


Overview

The socket is created once in `service.rs`, wrapped in an `Arc`, and shared between the listener and the sender/dummy so they all use the same bound port.

Graph subject to change as communication gets finalized

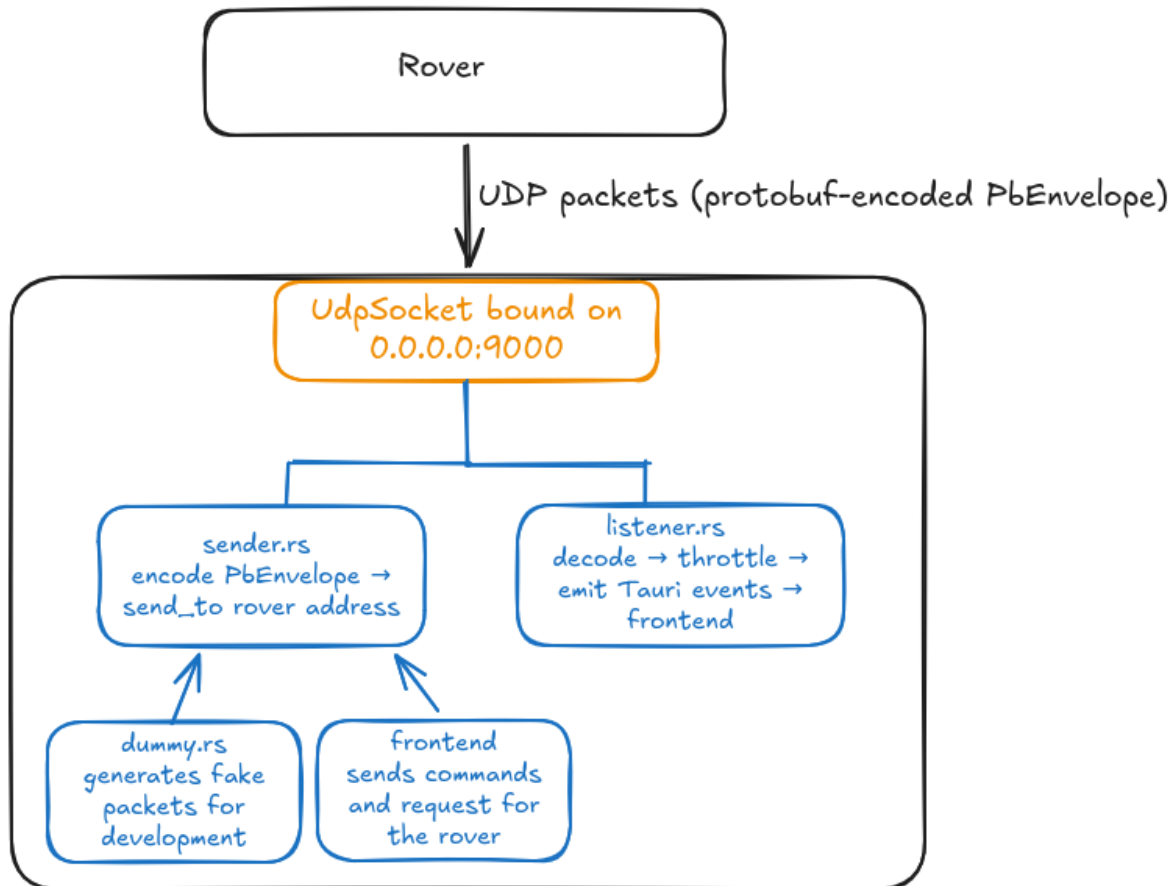

Revision #3

Created 2026-04-14 10:03:41 UTC by Candela Cimadevilla Gonzalez

Updated 2026-04-16 09:31:59 UTC by Candela Cimadevilla Gonzalez